


Sale Name: WALKERWORKS LLC & GARLAND HOME CENTER - THE BIGGEST AUCTION WE'VE EVER DONE. 1,800 LOTS. \$1 STARTING BIDS. EVERYTHING MUST GO. BULLSEYE BARGAINS BIN STORE GRAND OPENING WEEKEND

LOT 160 - [✓] [MSRP: \$139.00] Everbilt 1/4 HP 2-in-1 Submersible Utility and Transfer Pump

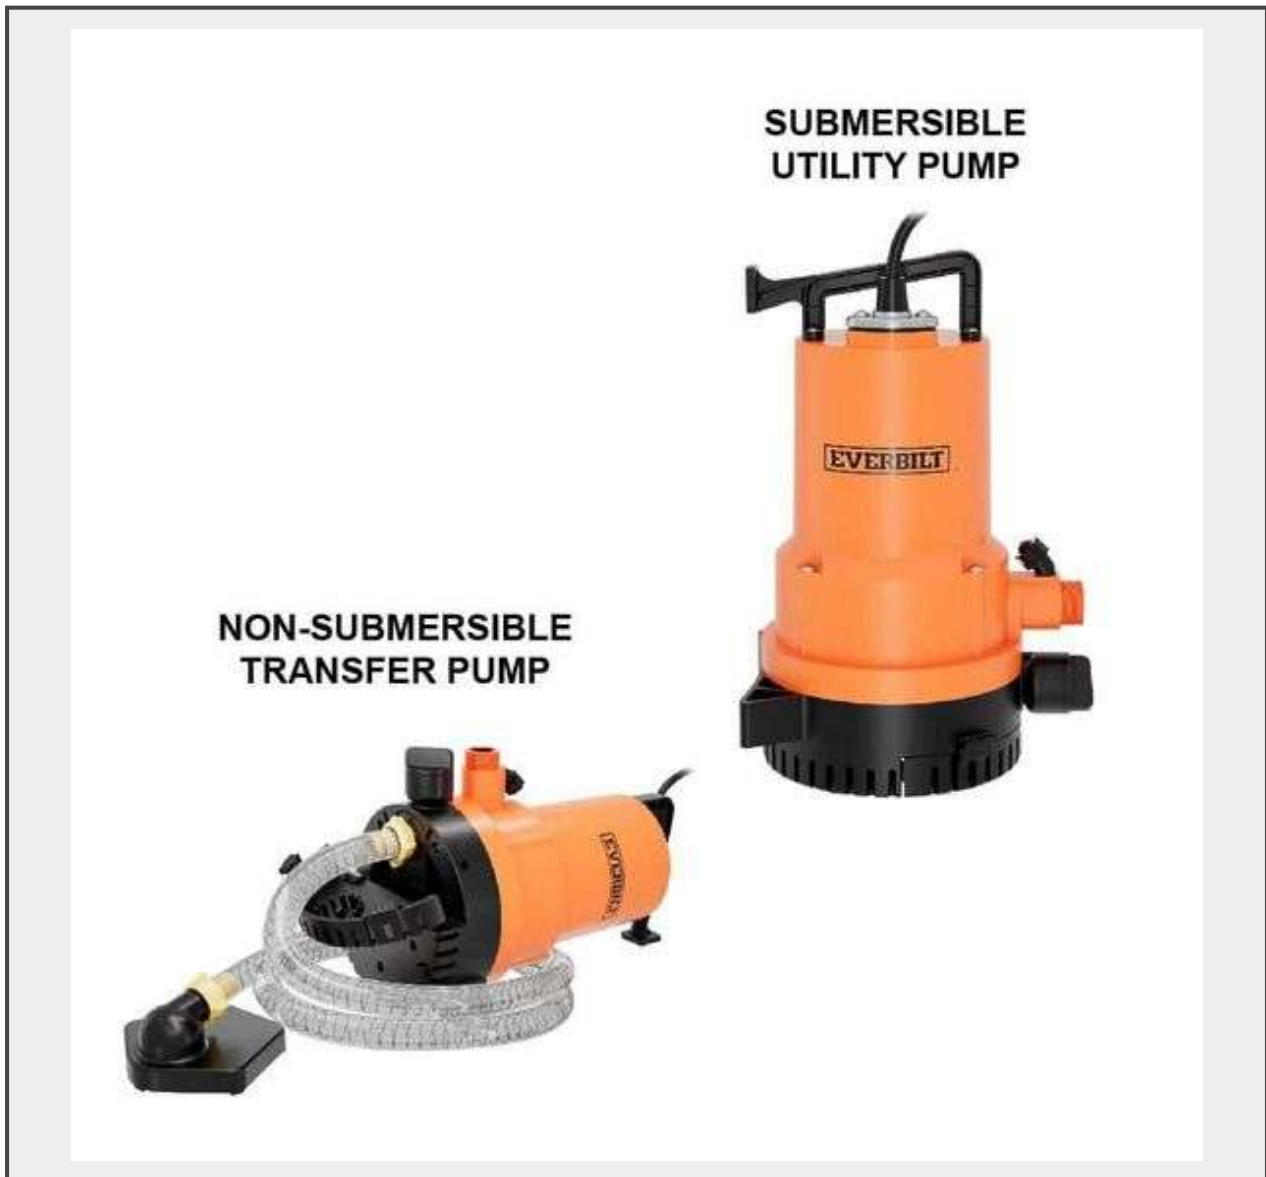

Description

About This Product - Everbilt 1/4 HP 2-in-1 Submersible Utility and Transfer Pump

There is a new standard in water removal pumps, the Everbilt 2-in-1 Utility Pump. This patented design is the first pump that can be operated in both submerged and non-submerged applications. If you need to drain an area like a flooded basement or pool cover, submerge the pump. If you need to drain a water heater or fish tank, use the transfer feature. Constructed of heavy-duty, corrosion-resistant thermoplastic. The energy-efficient, water-cooled, oil-free motor is safe around fish and plants. Handles up to 1/8 in. spherical solids. This is the only Utility Pump you will ever need.

Highlights

- Versatile 1/4 HP utility pump works 2 ways for water removal in many different applications
- Submersible applications: drain hot tubs, stock tanks, flooded basements, water gardens, flat roofs and window wells
- Submersible performance: Requires a minimum water depth of 1-1/2 in. to start pump, flow rate up to 1600 GPH at 0 ft of lift, maximum lift is 30 ft. removes water down to 1/2 in.
- Transfer applications: drain water from boats, waterbeds, clogged sinks, water heaters, aquariums, washing machines, and utility sinks
- Transfer performance: flow rate up to 950 GPH at 0 ft of lift, maximum lift is 30 ft., removes water down to 1/16 in. with the included suction strainer
- Includes suction hose and suction strainer for non-submersible transfer pump applications
- Water-cooled, oil-free motor is safe to use around fish and plants
- See-through suction hose allows for easy monitoring of pump priming to avoid running dry
- Snap-hook base makes cleaning quick and easy
- 3/4 in. garden hose threaded connection and 10 ft. power cord
- 2 year warranty
- [Shop All Everbilt Utility Pumps Here](#)

Specifications

Amperage (A): 2.5 A

Cord Length (ft.): 10 ft

Discharge Flow @ 0 ft. (gallons/hour): 1560

Discharge Flow @ 0 ft. (gallons/min): 26

Discharge Flow @ 10 ft. (gallons/hour): 1260

Discharge Flow @ 10 ft. (gallons/min): 21

Features: Portable

Head Pressure (ft.): 30

Housing Material: Thermoplastic

Impeller Material: Thermoplastic

Included: Hardware

Maximum Discharge Flow (gallons/hour): 1600

Maximum Horsepower (hp): 1/4

Maximum Pressure (PSI): 0

Maximum Working Temperature (F): 95

Minimum working temperature (F): 32

Outlet Connection: Threaded male

Pack Size: 1

Power Type Required: AC

Product Weight (lb.): 9.9 lb

Pump Switch Type: Switchless

Returnable: 90-Day

Vertical Lift (ft.): 30

Voltage: 115v

Certifications and Listings: CSA Certified

Manufacturer Warranty: 2 years

Product Depth (in.): 5.7 in

Product Height (in.): 11.42 in

Product Width (in.): 7.68 in

Product Information

Internet # 303642270

Model # UTA02510

Quantity: 1



<https://www.auctionhubtexas.com/>